

SAVE THESE INSTRUCTIONS

DEALER/INSTALLER: GIVE TO HOMEOWNER

LAK (LADDER ADAPTER KIT) INSTRUCTIONS

**FOR USE WITH CONFER PLASTICS LADDER MODELS
(7100B, 7100X, 8100X, 7000B, AND 7200)**




LAK shown on
7100X ladder

Parts List


- 1 - BASE
- 2 - DIAGONAL RAILS
- 12 - #10 x 1-1/4" SCREWS




It's best to install the LAK kit before you place ladder in the pool.
Assemble your Confer ladder using instructions provided with ladder

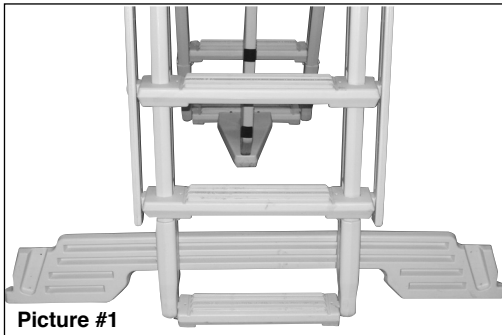


Picture #1

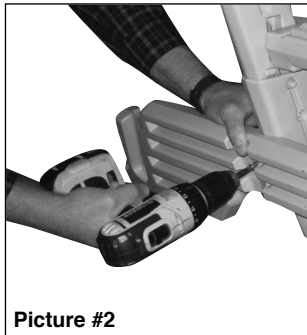

Picture #2

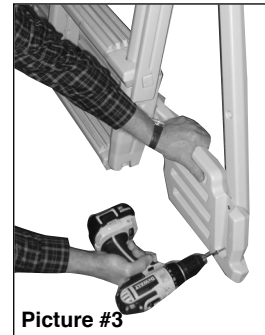

Picture #3

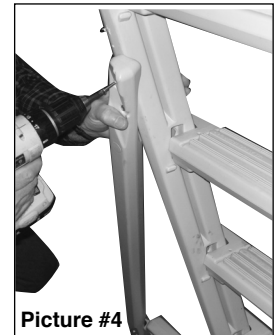

Picture #4

Step - 1 Place pool ladder on a level surface. Next place the base up against the back of the outside ladder legs. For models 7100B, 7100X and 8100X the side marked with #1 will face towards the ladder legs. For models 7000B and 7200 the side marked #2 will face towards the ladder legs. Reference Picture #1

Step - 2 With the base in place locate the two pre-marked screw locations for each ladder leg located on the back side of base. Using four of the #10 x 1-1/4" self tapping screws attach the base to both ladder legs. Reference Picture #2

Step - 3 Determine which end of the diagonal rails will be attached to the ladder legs. For models 7100B, 7100X and 8100X the end marked with #1 will attach to the ladder legs and the opposite end will attach to the base. On models 7000B and 7200 the end marked #2 will attach to the ladder legs. When positioned correctly the angles on the diagonal rails will align with, and overlap the ladder legs.

Step - 4 Place the proper end of the diagonal rail into the recess on the back side of the base. The top of the diagonal rail should align with, and overlap the ladder leg. While holding in place attach the bottom of the diagonal rail using two of the #10 x 1-1/4" self tapping screws through the pre-marked holes on the front side of the base. Reference Picture #3

Step - 5 Next attach the top of the diagonal rail to the back of the ladder leg using two of the #10 x 1-1/4" self tapping screws through the pre-marked holes on the back side of the diagonal rail. Repeat to attach the 2nd diagonal rail. Reference Picture #4

Step - 6 Place your ladder in your swimming pool by following the instructions supplied with ladder. The outside of the ladder should be on level firm ground.

DO NOT USE WITH INFLATABLE POOLS



MADE IN THE U.S.A. by:
CONFER
plastics inc.

97 Witmer Road
North Tonawanda, New York 14120-2421
Toll Free U.S. 800-635-3213
FAX 716-694-3102
www.conferladders.com